




1. Installation Recommendation

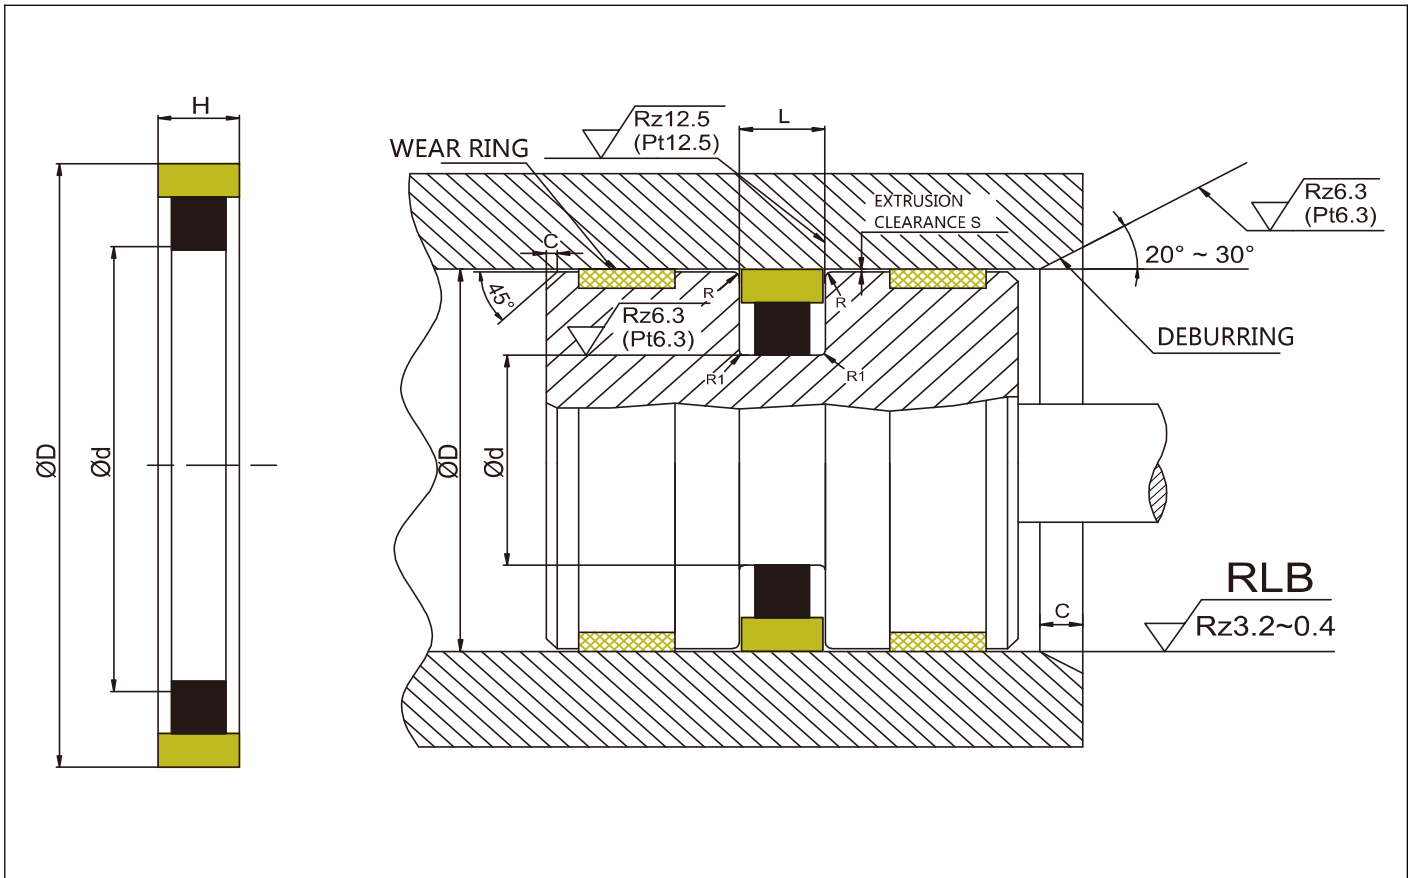

2. Application and properties

Standard double acting sealing, a wide range of applications. Friction resistance is very low, no crawling phenomenon, strong wear resistance, and saving installation space.

3. Standard materials

Sealing ring: filled PTFE

O-Ring: NBR / FKM

4. Working Conditions

Working Conditions				
Diameter Range	Pressure Range	Temperature Range	Speed	Medium
30 - 1600mm	0 - 35MPa	-30℃ +200℃	1.5 m/s	hydraulic oil, flame retardant liquid, water and others.



5. Installation Dimensions

Nominal Size of Packing, and Housing dimensions			L +0.2	Order No.
D	d	H		
30	20.5	4.3	4.5	SPG30*20.5*4.5
31.5	22	4.3	4.5	SPG31.5*22*4.5
32	22.5	4.3	4.5	SPG32*22.5*4.5
35	25.5	4.3	4.5	SPG35*25.5*4.5
35.5	26	4.3	4.5	SPG35.5*26*4.5
40	30	4.3	4.5	SPG40*30*4.5
45	35	4.3	4.5	SPG45*35*4.5
50	40	4.3	4.5	SPG50*40*4.5
55	45	4.3	4.5	SPG55*45*4.5
56	46	4.3	4.5	SPG56*46*4.5
60	50	4.3	4.5	SPG60*50*4.5
63	48	7.3	7.5	SPG63*48*7.5
65	50	7.3	7.5	SPG65*50*7.5
69	54	7.3	7.5	SPG69*54*7.5
70	55	7.3	7.5	SPG70*55*7.5
71	56	7.3	7.5	SPG71*56*7.5
75	60	7.3	7.5	SPG75*60*7.5
80	65	7.3	7.5	SPG80*65*7.5
85	70	7.3	7.5	SPG85*70*7.5
90	75	7.3	7.5	SPG90*75*7.5
95	80	7.3	7.5	SPG95*80*7.5
100	85	7.3	7.5	SPG100*85*7.5
105	90	7.3	7.5	SPG105*90*7.5
108	92	7.3	7.5	SPG108*92*7.5
110	94	7.3	7.5	SPG110*94*7.5
112	96	7.3	7.5	SPG112*96*7.5
120	104	7.3	7.5	SPG120*104*7.5
125	109	7.3	7.5	SPG125*109*7.5
130	114	7.3	7.5	SPG130*114*7.5
135	119	7.3	7.5	SPG135*119*7.5
140	124	7.3	7.5	SPG140*124*7.5
145	129	7.3	7.5	SPG145*129*7.5
150	134	7.3	7.5	SPG150*134*7.5
155	139	7.3	7.5	SPG155*139*7.5
160	144	7.3	7.5	SPG160*144*7.5
170	148	10.8	11	SPG170*148*11



Nominal Size of Packing, and Housing dimensions			L +0.2	Order No.
D	d	H		
180	158	10.8	11	SPG180*158*11
190	168	10.8	11	SPG190*168*11
200	178	10.8	11	SPG200*178*11
210	188	10.8	11	SPG210*188*11
215	193	10.8	11	SPG215*193*11
220	198	10.8	11	SPG220*198*11
230	208	10.8	11	SPG230*208*11
240	218	10.8	11	SPG240*218*11
250	228	10.8	11	SPG250*228*11
260	236	11.7	12	SPG260*236*12
270	246	11.7	12	SPG270*246*12
280	256	11.7	12	SPG280*256*12
290	266	11.7	12	SPG290*266*12
300	276	11.7	12	SPG300*276*12
310	286	11.7	12	SPG310*286*12
320	296	11.7	12	SPG320*296*12
330	308	9.75	10	SPG330*308*10
360	336	11.7	12	SPG360*336*12
400	376	11.7	12	SPG400*376*12
485	455	14.8	15	SPG485*455*15
500	470	14.8	15	SPG500*470*15
550	515	17.2	17.5	SPG550*515*17.5
600	570	14.8	15	SPG600*570*15
650	620	14.8	15	SPG650*620*15
720	690	14.8	15	SPG720*690*15
800	785	12.7	13	SPG800*785*13
900	870	24.5	25	SPG900*870*25
930	890	19	20	SPG930*890*20
950	925	17.7	18	SPG950*925*18
1000	960	19.7	20	SPG1000*960*20